

GO•GO®


SUPER PORTABLE



PRIDE®
MOBILITY
LIVE YOUR BEST®

Tel: +31 (0)85-0408630 . Fax: +31 (0)85-0430039
pridemobility.eu . info@prideeurope.nl

The Go Go Super Portable offers effortless mobility with a quick-fold design and a reliable lithium battery. Paired with Charge360, our innovative charging solution, you get faster, smarter, and more efficient charging. You're always ready to move.

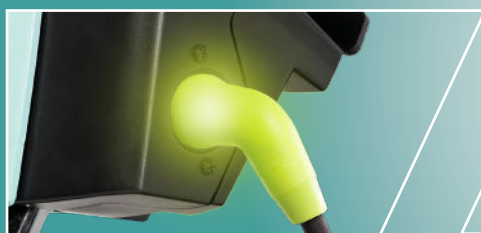

NEW! Charge360



Foldable



Sleek design

Specifications

Weight capacity	136 kg
Speed	Up to 7.2 km/h
Range per charge	Up to 16 km
Turning radius	1311 mm
Ground clearance	47 mm
Length	945 mm
Width	547 mm
Tires	7" solid, front 8" solid, rear
Drive	200W Brushless Transaxler
Weight without batteries	18.9 kg
Batteries	Type: Lithium-ion Size: 11.7 or 16 Ah
More?	Download our specifications sheet on the website

Features

- Folds down to a depth of 30 cm for convenient storage and transport
- Exclusive Charge360 battery charger connects magnetically in any direction for easy charging
- 2 Amp off-board charger
- Range of up to 16 km per battery.
- Powered by an airline compliant** lithium battery

**Note: Transport of this item on commercial aircraft is subject to federal regulations and airline policy. Please consult your airline prior to your flight to ensure your Go Go Super Portable and its 11.7 Ah lithium-ion battery are permitted.

1. Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.
2. Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
3. Battery weight may vary based on battery manufacturer.
4. Includes standard seat weight.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Available colors

