

# REVO<sup>®</sup> 2.0



**PRIDE<sup>®</sup>**  
MOBILITY  
LIVE YOUR BEST<sup>®</sup>

Tel: +31 (0)85-0408630 . Fax: +31 (0)85-0430039  
[pridemobility.eu](http://pridemobility.eu) . [info@prideeurope.nl](mailto:info@prideeurope.nl)


The Revo 2.0 is built sturdy and durable, and offers the reliability you expect from luxury mid-size scooters. Comfort Trac Suspension (CTS) provides a smooth and comfortable ride, even on varied terrain.



Easy disassembly



Under-seat storage

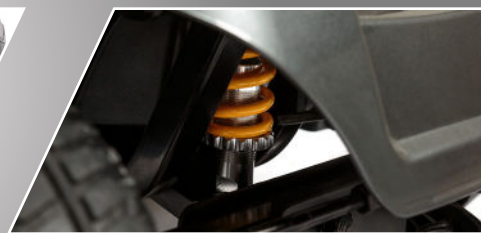

Front and rear CTS suspension

## Specifications

Weight capacity	181 kg
Speed	Up to 8,4 km/h
Range per charge	3W: Up to 28 km 4W: Up to 26,1 km
Turning radius	3W: 1016 mm 4W: 1323 mm
Ground clearance	32 mm
Length	3W: 1167 mm 4W: 1194 mm
Width	525 mm
Tires	3W: 8" solid front, 9" solid rear 4W: 9" pneumatic front and rear
Drive	Rear-wheel drive, sealed transaxle, 24-volt DC motor
Weight without batteries	3W: 54,3 kg 4W: 59,8 kg
Batteries	Type: Two 12-volt, sealed lead-acid, non-spillable deep-cycle Size: 35 Ah
More?	Download our specifications sheet on the website

## Features


- Comfort-Trac front and rear suspension
- Easily accessible tie-down points (for the transport of unoccupied scooter)
- Durable and stylish rear bumper
- Pride's exclusive black, flat-free, non-scuffing tires
- User-friendly console

1. Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.
2. Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
3. Battery weight may vary based on battery manufacturer.
4. Includes standard seat weight.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

## Available colors



Gray Street