



BAJA WRANGLER 2



PRIDE[®]
MOBILITY
LIVE YOUR BEST[®]

Tel: +31 (0)85-0408630 . Fax: +31 (0)85-0430039
pridemobility.eu . info@prideeurope.nl


The Baja® Wrangler® 2, the pioneer model in Pride's new Baja® Mobility outdoor range, brings unprecedented capabilities to the outdoor personal mobility vehicle category.



14,5" pneumatic tires



Easy to use display

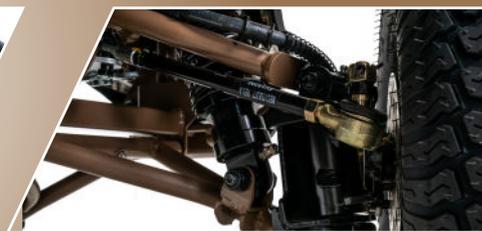

Front and rear CTS suspension

Specifications

Weight capacity	204 kg
Speed	Up to 15 km/h
Range per charge	Up to 26,5 km
Turning radius	2407 mm
Ground clearance	140 mm
Length	1556 mm
Width	837 mm
Tires	14,5" pneumatic, front and rear
Drive	Rear-wheel drive, Dual Inline, 24-volt DC motor
Weight without batteries	124,3 kg
Batteries	Type: Two 12-volt, sealed lead-acid, non-spillable deep-cycle Size: 75 Ah
More?	Download our specifications sheet on the website

Features

- Adjustable delta tiller with ergonomic, wraparound handles
- Full LED lighting package includes headlights, hazard lights, and directional signals
- Rear backup sensor LED lights indicates when you are too close to an object when in reverse
- CTS Suspension includes features industry-leading suspension for a much smoother ride
- User friendly LED console displays time, temperature, miles driven, and trips taken

1. Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.
2. Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
3. Battery weight may vary based on battery manufacturer.
4. Includes standard seat weight.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Available colors

