

VICTORY

XL 140 S




PRIDE[®]
MOBILITY
LIVE YOUR BEST[®]

Tel: +31 (0)85-0408630 . Fax: +31 (0)85-0430039
pridemobility.eu . info@prideeurope.nl

The Victory XL 140S is one of our most impressive mobility scooter models. With an impressive top speed of 20 km/h and a wide range of 36 km, the Victory XL 140S is ideal for demanding users.



13" pneumatic tires

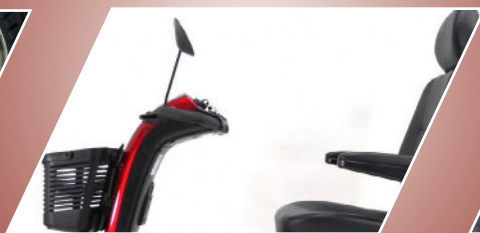

Rearview mirror standard



Front and rear suspension

Specifications

Weight capacity	181 kg
Speed	Up to 20 km/h
Range per charge	Up to 36 km
Turning radius	1803 mm
Ground clearance	64 mm
Length	1422 mm
Width	692 mm
Tires	13" pneumatic, front and rear
Drive	Rear-wheel drive, sealed transaxle, 24-volt DC motor
Weight without batteries	123 kg
Batteries	Type: Two 12-volt, sealed lead-acid, non-spillable, deep-cycle Size: 55 Ah or 75 Ah
More?	Download our specifications sheet on the website

Features

- Front and rear suspension for optimum handling
- Large 13" terrain gripping pneumatic tires for excellent outdoor performance
- Full lighting package including directional signals and lower headlight
- Easily accessible tie down points (for transport of unoccupied scooter)
- Delta tiller with wraparound handles

1. Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.
2. Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
3. Battery weight may vary based on battery manufacturer.
4. Includes standard seat weight.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Available colors

