

# VICTORY *XL 130*



**PRIDE**<sup>®</sup>  
MOBILITY  
LIVE YOUR BEST<sup>®</sup>

Tel: +31 (0)85-0408630 . Fax: +31 (0)85-0430039  
pridemobility.eu . info@prideeurope.nl


Luxe details, zoals een doorlopend deltastuur en heldere LED-verlichting, geven de Victory XL 130 een gestroomlijnd en sportief ontwerp.



13" luchtbanden



Hoogwaardig ontwerp

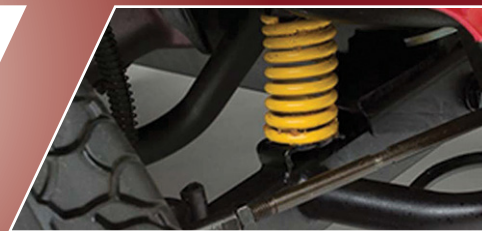

Voor- en achtervering

## Specificaties

Maximale belasting	158,8 kg
Snelheid	Tot 15 km/u
Maximale actieradius	Tot 37,9 km
Draaicirkel	1606 mm
Bodemvrijheid	94 mm
Lengte	1355 mm
Breedte	635 mm
Banden	13" luchtbanden, voor en achter
Aandrijving	Achterwielaandrijving, afgedichte transaxle, 24 volt gelijkstroommotor
Gewicht zonder accu's	96 kg
Accu's	Type: Twee 12-volt, sealed lead-acid, non-spillable deep-cycle Capaciteit: 55 Ah of 75 Ah
Meer?	Download het specificaties blad op de website

## Kenmerken

- Het goed zichtbare automatische achterremverlichtingssysteem
- Voor- en achtervering
- Exclusieve, soepele demontage zorgt voor het ultieme snelle transportsysteem
- Duurzame LED-koplamp, achterlicht en richtingaanwijzers met hoge intensiteit
- Gemakkelijk toegankelijke, op het stuur gemonteerde oplaadpoort voor standaard externe oplader met dubbele spanning

1. Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.
2. Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
3. Battery weight may vary based on battery manufacturer.
4. Includes standard seat weight.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

## Beschikbare kleuren

